




## P08033W

The P08033W Remote Access Dryer Cycling Module from PUREGAS is designed to provide total control and flexibility for the cycling of up to 8 air dryers. This process is fully automatic and will remain consistent with minimal required periodic maintenance.

- Remote alarm notification
- Cycle up to 8 dryers
- LCD display of all operating parameters
- IP and dial-up access
- Remote dryer reset
- GUI for easy programming
- Cycle by time or day of the week
- Emergency Backup feature standard
- Maintenance mode standard
- Easy to use digital display
- Password secured
- Cycles all manufacturers' dryers

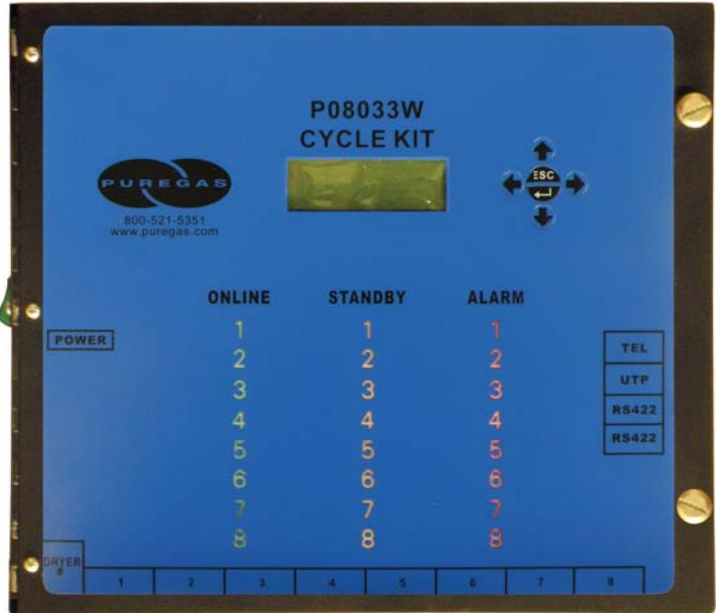

### Accessories (See next page for details)

- Interface Kit for PUREGAS "W" platform dryers
- Interface Kit for PUREGAS "D" & "DCO" model dryers
- Interface Kit for PUREGAS previous model & competitors' dryers

### Specifications

Power Requirements	120 VAC ( $\pm 10\%$ ), 1 Phase, 50/60 Hz (15 amp service maximum)
Running Amps	.08 Amps
Operating Temperature Range	40° to 85° F (5° to 30° C) (optimal)
Alarms	Power Fail alarm (capable of additional remote monitoring)
Dimensions	3.5" D x 13.25" W x 11.75" H (8.9 cm D x 33.65 cm W x 29.84 cm H)



## Dryer Cycling Interface Modules

These kits include everything required to connect your specific model air dryer to the PUREGAS P08033W Remote Access Dryer Cycling Module.

### PVDW34 -

- P550W Series
- P1500W Series
- P4200W Series




### PVDW31 -

- P20KW / P30KW
- P10KW / P15KW
- P6500W
- P4200W (Previous Model) & P4200DCO3A



### P08035 (PVDW33) -

- P20000D / P30000D
- P10000DCO / P15000DCO
- P8000DCO / P12000DCO
- P16000D / P24000D

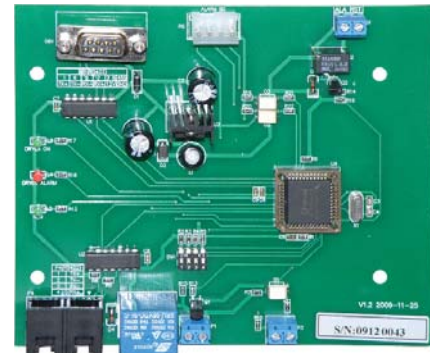

### P08970F1 (PVDW321) -

- Competitors' 120 VAC dryers

### P08970F2 (PVDW322) -

- P05000D / P06500D
- Competitors' 240 VAC dryers

