




## P60KW (30,000-60,000 SCFD)

- Slide out component trays for easy maintenance
- The lowest cost per SCFD available
- Modular design
- Real-time monitoring via LAN, modem or web browser
- Remote alarm reset capabilities - eliminates unnecessary call outs
- LCD display of all operating parameters
- Accurate humidity sensing within  $\pm 0.1\%$  RH
- Two liquid ring, lubricated compressors
- Minimum number of moving parts
- High and low pressure outlet

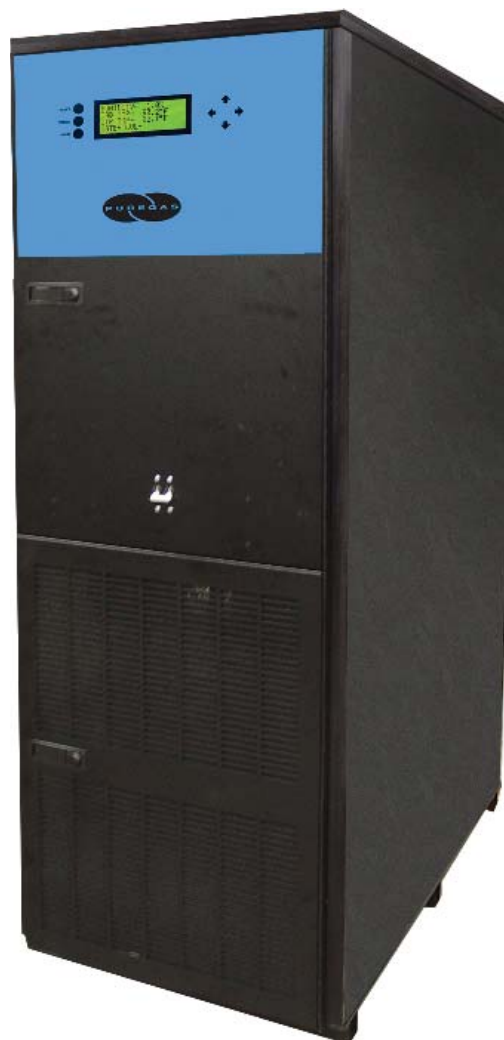

### Specifications

Output Capacity	60,000 SCFD
Power Requirements	208 VAC, 3 Phase, 60 Hz
Electrical Characteristics	Running Amps: 32 (50 amp service recommended)
Outlet Pressure Range	0-17 PSIG (adjustable)
Outlet Air Relative Humidity	Less than 2% RH
Compressor Type	Two Liquid Ring, 3 HP, 3 Phase
Drying Method	Refrigeration and Desiccant
Ambient Operating Temperature Range	40° to 120° F (5° to 48° C)
Noise Level	80 dBA at 3'
Heat Dissipation	20,030 BTU/hr
Alarms	Standard alarms - fully monitored, individual alarm indication display
Outlet Connections	Low Pressure: 3/4" NPT Female High Pressure: 3/4" NPT Female
Dimensions	40.5" D x 20.5" W x 57.5" H (103 cm x 52 cm x 146 cm)
Net Weight / Shipping Weight	725 lbs (328.9 kgs) / 818 lbs (371 kgs)